


WCDMA Module

SIM5218E

WCDMA/HSDPA/ HSUPA/A-GPS Module

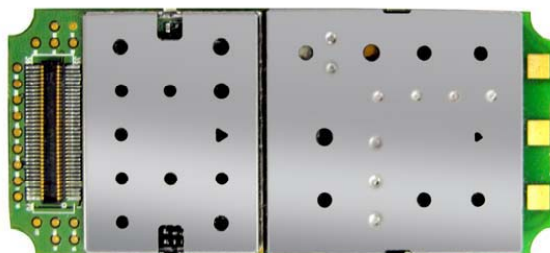

WCDMA/HSDPA(7.2Mbps)/HSUPA(5.76Mbps)/A-GPS Module

With High Speed HSDPA/HSUPA functionality and strong capability in extension, SIM5218 is an ideal for a wide arrange of products including USB Modems, Gateways, Routers, PDAs, Video Phone, Tracking Solutions, Security Solutions with Video and many more.

Advanced Features:

- Tri-Band UMTS/HSDPA/HSUPA 2100/1900/900 MHz
- Quad-Band GSM/GPRS/EDGE, 850/900/1800/1900 MHz
- HSDPA 7.2Mbps
- HSUPA 5.76Mbps
- GPS Positioning
- USB 2.0 High speed or UART support
- Integrated TCP/UDP/IP protocol stack
- Video call with Camera interface
- Embedded SIM card (option)
- WCDMA Diversity
- WCDMA Equalizer

General Features

- HSDPA 7.2Mbps
- HSUPA 5.76Mbps
- UMTS/HSDPA 900/1900/2100MHz
- Quad-Band GSM 850/900/1800/1900MHz
- GPRS multi-slot Class 12

WCDMA Module

- EDGE multi-slot Class12
- UMTS/HSDPA 3GPP release 5
- UMTS/HSUPA 3GPP release 6
- GSM 3GPP release 99
- Output Power
 - > UTS 2100/1900/850: 0.25W
 - > GSM 850/900: 2W
 - > DCS 1800/ PCS1900: 1W
- Control via AT Commands
- Supply voltage range: 3.4V-4.2V
- Temperature range
 - > Normal operation: -15°C to +55°C
 - > Restricted operation: -20°C to +70°C
 - > Storage temperature: -40°C to +85°C
- Dimension: 58 X 26 X 4.5mm
- Weight: about: TBD

Spec for A-GPS

- A-GPS mode: MS-based, MS-Assisted

Spec for Data Transfer

- HSDPA:
 - > Max. 7.2Nbps (DL)
 - > UE Category: 4,6,8,12
- HSUPA:
 - > Max. 5.76Mbps (UL)
- HSUPA+HSDPA:
 - > Max. 2.0Mbps (UL)
 - > +3.6Mbps (DL)
- WCDMA:
 - > Max. 384Kbps (DL)
- EDGE Class:
 - > Max. 236.8Kbps (DL)
 - > Max. 118Kbps (UL)
- GPRS:
 - > Max. 85.6Kbps (DL)
 - > Max. 42.Kbps (UL)
- CSD:
 - > GSM Data rate 14.4Kbps
 - > WCDMA Data rate 57.6Kbps

Spec for SMS

- Point to point MO and MT
- Text and PDU mode

Spec for Voice

- Voice Codec HR, FR, EFR
- AMR
- DTMF

Spec for CSD

- Support in GSM and WCDMA

Spec for Network Identity and Time Zone (NITZ)

- Support in GSM and WCDMA

WCDMA Module

Spec for Video call

- DTMF on H245
- Support standard WCDMA 64Kbps (CS) video call

Other features

- USB Driver for Microsoft Windows 2000/XP/Vista
- USB Driver for Linux 2.6.16
- Firmware update via USB

Interfaces

- Embedded SIM card (option)
- USB2.0
- UART
- SIM card
- Audio: 2 Microphone, 3 speakers
- Video (Camera)
- GPIO
- I2C
- Min-SD card